

MOD4I/S: 4 digitale inputmodule voor NO contacten in 2M modulaire behuizing

De MOD4I/S modules verzenden 4 ON-OFF signalen komende van bv. drukknoppen, limietschakelaars, nabijheidschakelaars, enz. De inputcontacten moeten vrij zijn van elk mogelijk potentiaal en moeten gevoed worden door de referentiespanning voorzien door de module zelf.

De MOD4I/S modules hebben een 5-polige aansluitingsblok voor de verbindingen tot de inputcontacten en een 5-polige aansluitingsblok voor de verbindingen tot de 4-draadse bus. De vijfde aansluiting wordt enkel gebruikt door de adresprogrammeur.

Een groene led aan de rechterkant van het input-aansluitingsblok rapporteert de power-on conditie. Een label op het voorpaneel is voorbehouden om het geprogrammeerde adres van de module te noteren.

De MOD4I/S module kan in systemen met MCP-XT, MCP-MOD en MCP-Plus controllers werken.




Adresprogrammatie

De MOD4I/S module neemt enkel 1 inputadres op die toegekend moet worden met de FXPRO programmer. Het adres moet binnen het bereik van 1 tot 127 gaan.

Bedrading

De MOD4I/S module laat de verbindingen tot potentiaalvrije contacten, gevoed door de referentiespanning voorzien door de module zelf (aansluiting C) zoals in de volgende tekening, toe.


Opmerking: de inputs kunnen niet elektrisch geïsoleerd zijn van de busvoeding.

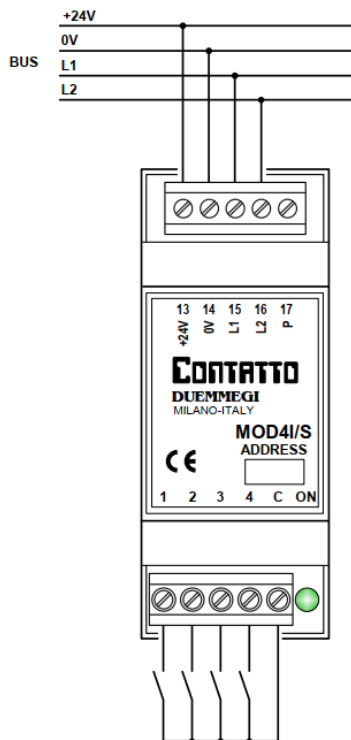

Technische kenmerken

Voeding	24V \pm 25% SELV
MAX. stroomconsumptie	35mA
Stroom voor elke input	4,5mA @ 24V
Threshold inputspanning	8V
Bedrijfstemperatuur	-10 – +50 °C
Bewaartemperatuur	-30 – +85 °C
Beveiligingsgraad	IP20

Afmetingen

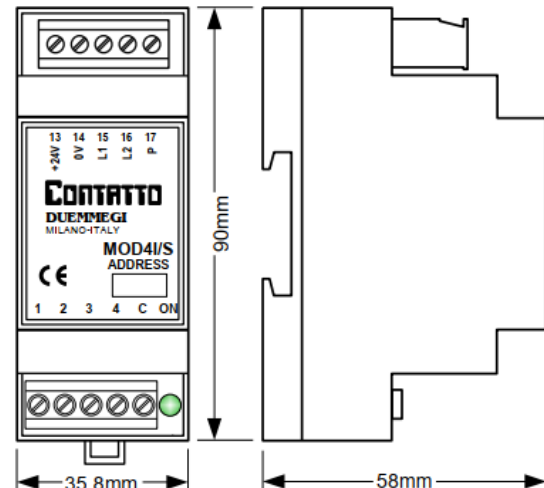

Correct disposal of this product

(Waste Electrical & Electronic Equipment)
(Applicable in the European Union and other European countries with separate collection systems). This marking on the product, accessories or literature indicates that the

product should not be disposed of with other household waste at the end of their working life. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate these items from other types of waste and recycle them responsibly to promote the sustainable reuse of material resources. Household users should contact either the retailer where they purchased this product, or their local government office, for details of where and how they can take these items for environmentally safe recycling. This product and its electronic accessories should not be mixed with other commercial wastes for disposal.

Installation and use restrictions**Standards and regulations**

The design and the setting up of electrical systems must be performed according to the relevant standards, guidelines, specifications and regulations of the relevant country. The installation, configuration and programming of the devices must be carried out by trained personnel. The installation and the wiring of the bus line and the related devices must be performed according to the recommendations of the manufacturers (reported on the specific data sheet of the product) and according to the applicable standards.

All the relevant safety regulations, e.g. accident prevention regulations, law on technical work equipment, must also be observed.

Safety instructions

Protect the unit against moisture, dirt and any kind of damage during transport, storage and operation. Do not operate the unit outside the specified technical data.

Never open the housing. If not otherwise specified, install in closed housing (e.g. distribution cabinet). Earth the unit at the terminals provided, if existing, for this purpose. Do not obstruct cooling of the units. Keep out of the reach of children.

Setting up

The physical address assignment and the setting of parameters (if any) must be performed by the specific softwares provided together the device or by the specific programmer. For the first installation of the device proceed according to the following guidelines:

- Check that any voltage supplying the plant has been removed
- Assign the address to module (if any)
- Install and wire the device according to the schematic diagrams of the specific data sheet of the product
- Only then switch on the 230Vac supplying the bus power supply and the other related circuits

Applied standards

This device complies with the essential requirements of the following directives:

2014/30/UE (EMC)
2014/35/UE (Low Voltage)
2011/65/UE (RoHS)

Note

Technical characteristics and this data sheet are subject to change without notice.